



US005912434A

United States Patent [19]**Robinson**

[11] **Patent Number:** **5,912,434**
 [45] **Date of Patent:** **Jun. 15, 1999**

[54] **KENNY CLAMP**[76] **Inventor:** **Wayne H. Robinson**, 671 Teton Dr.,
Lothian, Md. 20711[21] **Appl. No.:** **08/939,658**[22] **Filed:** **Sep. 29, 1997**[51] **Int. Cl⁶** **H02G 15/02; H02G 3/18**[52] **U.S. Cl.** **174/78; 174/51; 174/65 R**[58] **Field of Search** **174/78, 74 R,
174/65 R, 51, 151; 439/98, 99**[56] **References Cited****U.S. PATENT DOCUMENTS**

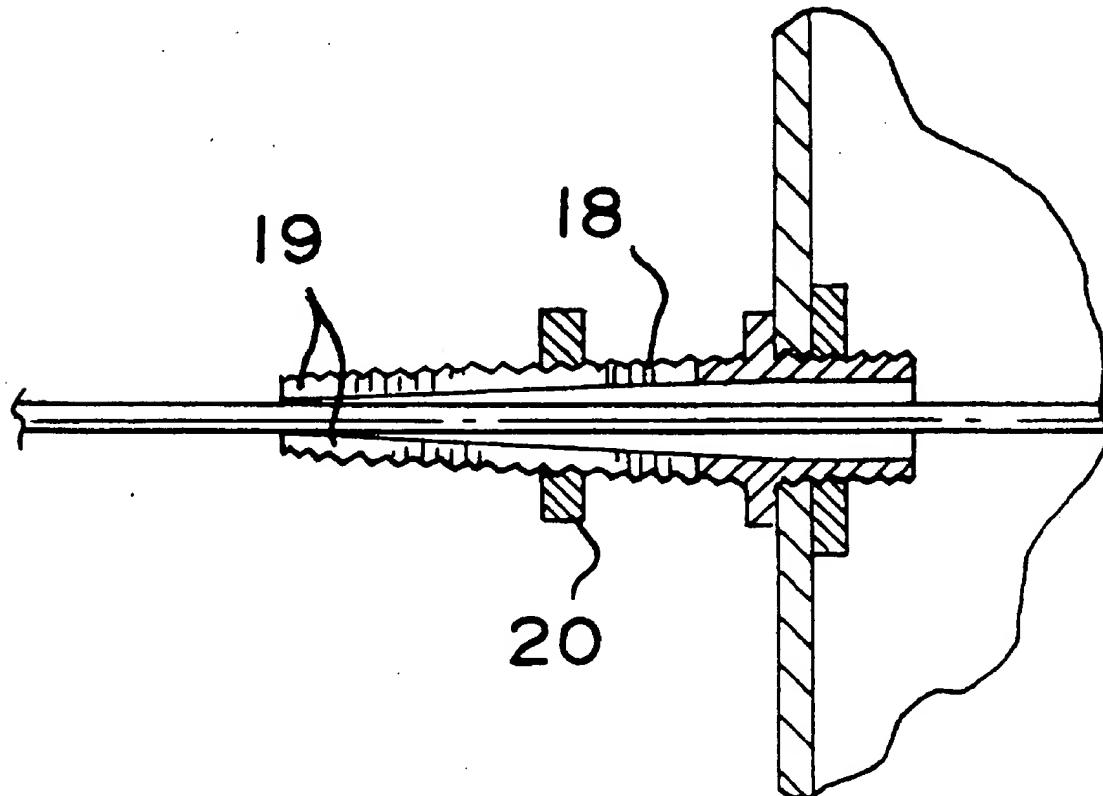
2,704,357	3/1955	Johnson	174/65 R X
2,710,381	6/1955	Monson	174/51 X
3,009,128	11/1961	De Carlo	174/51 X
3,206,539	9/1965	Kelly	174/68.3

4,145,566	3/1979	Weingartner	174/65 R
4,151,363	4/1979	Nichols	174/65 R
4,209,661	6/1980	Pate et al.	174/65 R
5,513,513	5/1996	Suess et al.	72/409.70
5,594,202	1/1997	Tobias	174/65 R X

Primary Examiner—Kristine Kincaid**Assistant Examiner**—Chau N. Nguyen**Attorney, Agent, or Firm**—Robert Halper[57] **ABSTRACT**

A grounding electrode conductor passes through a metallic surface of a panel board and is connected to a bus bar provided in the panel board. The conductor is supported by a press sleeve connector mounted on the panel board. A clamp is used to contact and secure the conductor to the connector. Both the grounding electrode conductor and the connector are in conformance with the 1996 National Electrical Code.

6 Claims, 2 Drawing Sheets

C 542 U.S.
09/614707

07/12/00